

NASA TECH BRIEF

Goddard Space Flight Center




NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

A Pseudo Random-Access Synchronous Meteorological Satellite System

The problem:

To devise a system for extracting meteorological data from an active Earth station via a satellite communications system. The most common pseudo-random access synchronous meteorological satellite

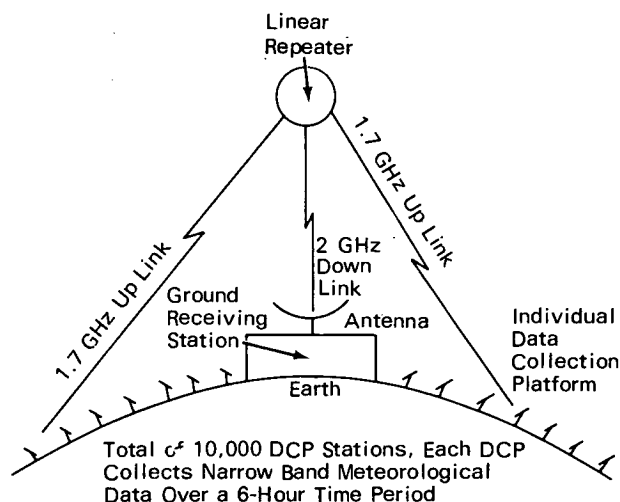

cedure for obtaining definitive meteorological data uses existing terrestrial communications links where the data is, in many cases, collected and reported manually. However, a system of this nature is slow and inefficient, and many locations are completely inaccessible to the installation of such terrestrial links.

The solution:

A communications satellite system (see fig.) which uses a pseudo-random time frequency multiplexing technique for extracting real-time meteorological data from a great number of isolated weather stations (data collection platforms, DCP) situated at random throughout the world.

How it's done:

The multiple access system uses a single communications satellite repeater, located at a synchronous altitude (41,255 km, or 22,300 n. miles), as the relay point for retransmitting all data to a common central processing station. The system can, for instance, extract data from 10,000 independent DCP stations during any 6-hour time period.

Each DCP would transmit with an output power of 10 watts, using an omni-directional antenna. The up and down links are in the L-band, approximately 2 GHz, with a 10 MHz bandwidth for 10,000 DCP stations. The data rate would be less than 1 kHz per station. All DCP's report for at least 10 seconds once every 6 hours. The DCP's are frequency multiplexed into 8 groups of 1250 each; and the groups, in turn, are time multiplexed so that no more than 38 bandwidths will time-overlap in the 6 hour time frame. The only interference to the DCP channel is due to thermal noise and the uncorrelated noise from the other 38 in-band channels. With these specifications, the selected DCP frequency stability need not be better than 1 part in 10^5 to minimize intrachannel interference. The DCP station need not have a receive capability, and the timer stability of the transmitter is only ± 316 seconds for 1 year. The result is a simple, low-cost DCP station.

Note:

No additional documentation is available. Specific questions, however, may be directed to:

Technology Utilization Officer
Goddard Space Flight Center
Greenbelt, Maryland 20771
Reference: B71-10220

(continued overleaf)

Patent status:

No patent action is contemplated by NASA.

Source: R. J. Darcey of
Goddard Space Flight Center, and
R. J. Martel of
Westinghouse Electric Corp.
under contract to
Goddard Space Flight Center
(GSC-10895)